

NEW



TELESKID | 3TS-8W/3TS-8T

Gross rated power: 74 hp/55 kW | Lift capacity: 3,208-3,695 lb (1,347-1,676 kg) | Max load height: 13 ft 5 in (4.1 m)



HONEST, RELIABLE & REACTIVE
SOLUTIONS FOR WORKING AT HEIGHT



CONTACT US

☎ 0800 865 4455

✉ info@hiresafesolutions.com

🌐 www.hiresafesolutions.com



NOW YOU CAN


Introducing a unique machine with endless possibilities. The new JCB Teleskid is the first skid steer or compact track loader with a telescopic boom, making it the most versatile machine you've ever seen. It can lift higher, reach further and dig deeper than any other skid steer on the market and can access areas you wouldn't have thought possible.



HONEST, RELIABLE & REACTIVE
SOLUTIONS FOR WORKING AT HEIGHT



CONTACT US

-  0800 865 4455
-  info@hiresafesolutions.com
-  www.hiresafesolutions.com



6 The first skid steer and compact track loader with both vertical and radial lift.

7 Zero turning radius allows you to work in tight spaces.

8 With a SAE operating weight of 12,615 lb on the compact track loader and 9,859 lb on the skid steer loader, the JCB Teleskid can easily be transported between sites on a trailer.

9 Standard flow of 24 gpm (70 lpm) with the boom extended or retracted – and optional high flow of 33 gpm with the boom retracted – allows versatile use of attachments.

10 SAE/ISO standard quick hitch allows use of any skid steer and compact track loader attachment, with a single-point quick hitch lock-and-unlock flag for enhanced visibility.

JCB Teleskid is the only skid steer loader/compact track loader on the market with true bi-directional and extendable parallel lift.



HONEST, RELIABLE & REACTIVE SOLUTIONS FOR WORKING AT HEIGHT



CONTACT US

- 0800 865 4455
- info@hiresafesolutions.com
- www.hiresafesolutions.com



UNRIVALED STRENGTH AND STABILITY.

WITH A PROVEN, HIGH-STRENGTH STEEL BOOM MOUNTED ON A SINGLE-PIECE, FULLY WELDED CHASSIS, THE JCB TELESKID IS CONSTRUCTED FOR MAXIMUM STRENGTH AND EARNING POTENTIAL.

1 A solid undercarriage with cast steel, triple flanged rollers provides excellent track retention.

2 The JCB telescopic boom has a proven track record on over 200,000 machines. JCB's extreme testing program includes prolonged high-stress loading, cold climate testing and repeated transmission use over thousands of cycles.

3 The boom is mounted on a single-piece, fully welded chassis to maximize strength and minimize weight.

4 High-strength steel boom has reduced joints and stress points, and a single-piece, U-pressed design.

5 Centralized lift and extension rams evenly distribute load stresses. Rams are held in place by keyhole castings for greater structural integrity.

Recessed rear door gives increased protection from damage.



1



2



3



4

Quick hitch constructed of high-strength steel with high-strength welds.



5



HONEST, RELIABLE & REACTIVE
SOLUTIONS FOR WORKING AT HEIGHT



CONTACT US

0800 865 4455

info@hiresafesolutions.com

www.hiresafesolutions.com



TOTAL COMFORT AND CONTROL.

WITH EASY SIDE-DOOR ENTRY, THE LARGEST CAB ON THE MARKET AND ALL-ELECTRIC CONTROLS, THE JCB TELESKID OFFERS UNRIVALED COMFORT AND CONTROL.



1

1 The JCB Teleskid cab is 33 percent larger than the industry average, putting it in a class of its own.

2 All models feature a side entry door that is more than twice the size of the competition.

3 Arm rests provide support when operating the boom controls. The left arm rest features a storage space and 12 V socket.

4 Fully adjustable, heated, air suspension seat provides maximum comfort for the operator.



2



3



4

HireSafe
SOLUTIONS

HONEST, RELIABLE & REACTIVE
SOLUTIONS FOR WORKING AT HEIGHT



CONTACT US

0800 865 4455

info@hiresafesolutions.com

www.hiresafesolutions.com



5 JCB's Teleskid mono-boom design provides an exceptional 270-degree field of vision.

6 JCB's Teleskid offers 60 percent better visibility than conventional twin-arm skid steer and compact track loaders.

7 Laminated side glass, rather than mesh, further enhances all-round visibility.

Eye-level rear view mirror for excellent rear visibility.



6

Ordinary Skid Steer | 65° Visibility



5

JCB Teleskid 270° Visibility



7



HONEST, RELIABLE & REACTIVE
SOLUTIONS FOR WORKING AT HEIGHT



CONTACT US


0800 865 4455

info@hiresafesolutions.com

www.hiresafesolutions.com



STATIC DIMENSIONS

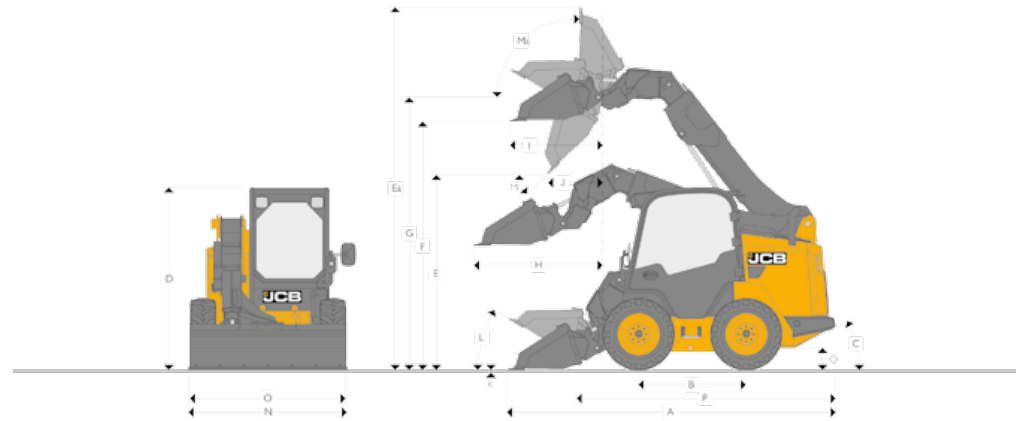

| Machine model | 3TS - 8W | | 3TS - 8T | | |
|--|----------------|---------------|----------------|---------------|---------------|
| | Retracted Boom | Extended Boom | Retracted Boom | Extended Boom | |
| A Overall Length | ft-in (m) | 12-5 (3.8) | 16-1 (4.9) | 12-5 (3.8) | 16-1 (4.9) |
| B Wheel Base | ft-in (m) | 4-1 (1.25) | | 6-11 (2.1) | |
| C Angle of Departure | degrees | 29 ° | | 29 ° | |
| D Overall Height | ft-in (m) | 6-11 (2.1) | | 6-11 (2.1) | |
| E Dump Height | ft-in (m) | 7-7 (2.3) | 10-4 (3.1) | 7-10 (2.4) | 10-8 (3.2) |
| Ea Crowd height | ft-in (m) | 13-5 (4.1) | 16-9 (5.1) | 13-5 (4.1) | 18-4 (5.0) |
| F Loadover Height | ft-in (m) | 9-7 (2.94) | 12-3 (3.7) | 9-6 (2.9) | 12-5 (3.8) |
| G Height to Hinge Pin Fully Raised | ft-in (m) | 10-6 (3.2) | 13-3 (4.05) | 10-6 (3.2) | 13-2 (4.03) |
| H Reach @ Ground Level | ft-in (m) | 3-6 (1.1) | 7-4 (2.25) | 3-6 (1.1) | 7-4 (2.25) |
| I Max Reach @ Full Height | ft-in (m) | 3-6 (1.07) | 5-7 (1.7) | 3-3.3 (1) | 5-7 (1.7) |
| J Reach @ Full Height - Fully Dumped | ft-in (m) | 2-1 (0.6) | 4-3 (1.4) | 2-1 (0.7) | 4-3 (1.3) |
| K Dig Depth (toe plate horizontal) Clearance | in (mm) | -3/8 (-10) | | -3/8 (-10) | |
| L Rollback @ Ground | degrees | 30 ° | | 30 ° | |
| M Dump Angle | degrees | 42 ° | | 42 ° | |
| Ma Max Rollback Angle | degrees | 94 ° | | 94 ° | |
| N Bucket Width - Standard | ft-in (m) | 6-1 (1.85) | | 6-1 (1.85) | |
| O Width Over Tires - Standard | ft-in (m) | 6-0 (1.8) | | 6-5 (2.0) | |
| Width Over Tires - Optional | ft-in (m) | 6-4 (1.92) | | | |
| P Length Without Attachment | ft-in (m) | 9-11 (3.02) | | 9-11 (3.02) | |
| Q Ground Clearance | in (mm) | 9.4 (238) | | 9.4 (238) | |
| Rated Operating Capacity 35% | ft-in (m) | | | 3,695 (1,676) | 2,306 (1,046) |
| Rated Operating Capacity 50% | lb SAE (kg) | 3,208 (1,455) | 1347 (611) | | |
| Bucket Capacity - Standard | yd³ (m³) | 0.56 (0.43) | | 0.56 (0.43) | |
| Bucket Capacity - Optional | yd³ (m³) | 0.47 (0.36) | | 0.47 (0.36) | |



HONEST, RELIABLE & REACTIVE
SOLUTIONS FOR WORKING AT HEIGHT

CONTACT US

0800 865 4455

info@hiresafesolutions.com

www.hiresafesolutions.com



| TURNING RADIUS | | | |
|----------------------|-----------|------------|------------|
| Model | | 3TS-8W | 3TS-8T |
| Bucket Corner Radius | ft-in (m) | 7-6 (2.3) | 7-6 (2.3) |
| Quick Hitch Radius | ft-in (m) | 4-11 (1.5) | 5-7 (1.7) |
| Rear Chassis Radius | ft-in (m) | 5-9 (1.76) | 5-9 (1.76) |

| SAE OPERATING WEIGHT | | | |
|----------------------|---------|---------------|----------------|
| Model | | 3TS-8W | 3TS-8T |
| Cab | lb (kg) | 9,859 (4,472) | 12,615 (5,722) |
| Canopy | lb (kg) | 9,726 (4,412) | 12,482 (5,662) |

| ENGINE | | | |
|---|------------|-------------------|--|
| Engine Model | | EcoMAX TCAE-55 | |
| Displacement | in³ (cm³) | 268 (4399) | |
| Fuel | | Diesel | |
| Cooling | | Water | |
| Aspiration | | Turbo | |
| Gross Power @ 2400 rpm SAE J1995 | hp (kW) | 74 (55) | |
| Gross Torque @ 1200 rpm | lb/ft (Nm) | 295 (400) | |
| Emission Certification | | EPA-T4F (EU St3B) | |
| Engine Oil Service Interval- Hours | | 500 | |
| Variable Speed Hydraulically Driven Fan | | YES | |

| SERVICE CAPACITIES | | | |
|--------------------------------------|--------------|------------|--|
| Hydraulic System (including tank) | gal (liters) | 14.5 (55) | |
| Fuel Tank | gal (liters) | 27.2 (103) | |
| Engine Coolant | gal (liters) | 5.8 (22) | |
| Engine Oil | gal (liters) | 3.7 (14) | |
| LH Chaincase (wheeled machines only) | gal (liters) | 3.1 (11.7) | |
| RH Chaincase (wheeled machines only) | gal (liters) | 3.1 (11.7) | |

| HYDRAULIC PERFORMANCE | | | |
|------------------------|---------|---------------|----------------|
| Model | | 3TS - 8W | 3TS - 8T |
| R.O.C Retracted | lb (kg) | 3,208 (1,455) | 3,695 (1,676) |
| R.O.C Extended | lb (kg) | 1,347 (611) | 1,614 (732) |
| Tipping Load Retracted | lb (kg) | 6,418 (2,911) | 10,558 (4,789) |
| Tipping Load Extended | lb (kg) | 2,694 (1,222) | 4,612 (2,092) |
| Loader Lift Retracted | lb (kg) | 5,765 (2,615) | 5,574 (2,528) |
| Loader Lift Extended | lb (kg) | 3,461 (1,570) | 3,874 (1,757) |
| Bucket Tilt Retracted | lb (kg) | 6,543 (2,968) | 6,517 (2,956) |
| Bucket Tilt Extended | lb (kg) | 6,543 (2,968) | 6,517 (2,956) |

| HYDRAULICS | |
|--------------------|--|
| Pump Flow | 24 gpm (90 lpm) @ 2,300 rpm |
| | Main relief pressure 3,335 psi (230 bar) |
| | HYD HP Low Flow (46.7 hp) |
| | HYD HP High Flow (64.2 hp) |
| Optional High Flow | 33 gpm (125 lpm) |

| ELECTRICS | | | |
|---------------|---------|------------|--|
| Starter Motor | hp (kW) | 5.63 (4.2) | |
| Battery | V/Ah | 12 / 109 | |
| Alternator | amps | 95 | |

| TRANSMISSION | | | |
|-----------------------|--|------------------------|------------------------|
| Model | | 3TS-8W | 3TS-8T |
| Single Speed mph (km) | | 6.8 (10.9) | 5.7 (9.2) |
| Two Speed mph (km) | | 6.8 (10.9) / 12.4 (20) | 4.8 (7.7) / 7.8 (12.6) |

| TIRES / TRACKS | | | |
|-------------------|--|---|-------------------------------|
| Model | | 3TS - 8W | 3TS - 8T |
| Standard | | 12 x 16.5 - 10 PR | 17.7 in (450 mm) traction lug |
| Available Options | | Solid Industrial Lifemaster Industrial Pneumatic 33 / 15.5 x 16.5 Extra Flotation | Wide Track |



HONEST, RELIABLE & REACTIVE
SOLUTIONS FOR WORKING AT HEIGHT



CONTACT US

0800 865 4455

info@hiresafesolutions.com

www.hiresafesolutions.com

