

SPECIFICATIONS



Size	Metric	British
Max. Working Height A	28.00m	91' 10"
Max. Platform Height B	26.00m	85' 4"
Overall Length C	5.96m	19' 7"
Overall Width D	2.50m	8' 2"
Overall Height(Rails Up) E	4.13m	13' 7"
Overall Height(Rails Down) F	3.19m/☆3.41m	10' 6"/☆11' 2"
Platform Size(Length×Width)	5.48m×2.45m	18' × 8'
Platform Extension Size G	2.10m	6' 11"
Ground Clearance	0.23m	9"
Wheelbase H	4.10m	13' 5"
Turning Radius(Inside/Outside)	3.50m/6.00m	11' 6"/19' 8"
Tyres	355/55D625	355/55D625

Performance		
S.W.L	1000kg	2204lb
S.W.L On Extension	1000kg	2204lb
Max. Occupants (Indoor/Outdoor)	4/4	4/4
Gradeability	30%	30%
Travel Speed(Stowed)	≈3.5km/h	≈2.17mph
Travel Speed(Raised)	≈0.3km/h	≈0.19mph
Max. Working Slope(X/Y)	2°/3°	2°/3°
Up/Down Speed	130/100sec	130/100sec

Weight		
Overall Weight	20360kg	44886lb

Power		
Range Extended Engine	KUBOTA Z482/9.8kW	KUBOTA Z482/9.8kW
Diesel Tank	130L	34gal
Hydraulic Tank	260L	69gal
Lithium Battery	80V/420Ah	80V/420Ah
Charger	80V/80A	80V/80A
Driving Motor	4×53VAC/2kW	4×53VAC/2kW
Lifting Motor	53VAC/28kW	53VAC/28kW

Note: ☆ indicates overall height with guardrails folded inward.

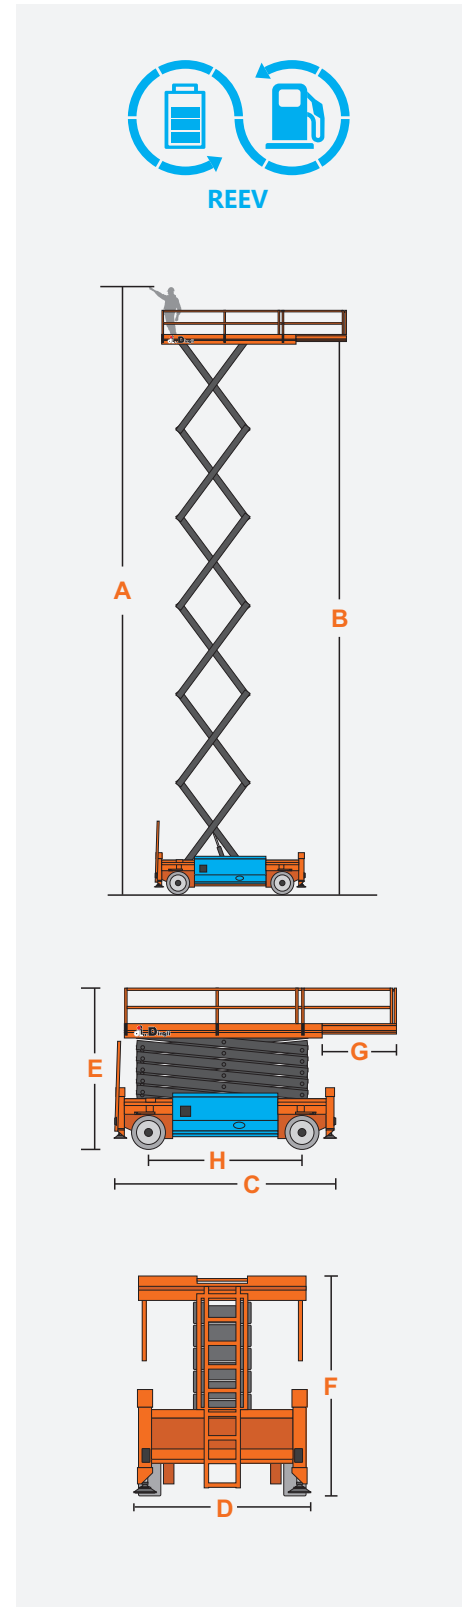

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Automatic One-Way Platform Extension Deck
- Four-Wheel Drive
- Four-Wheel Steering
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height

