TeleCrawler22N

CAPACITY 136 kg
(1 person 80 kg + tool box 56 kg)
CAPACITY 230 KG
(2 persons 80x2=160 kg + tool box 70 kg)

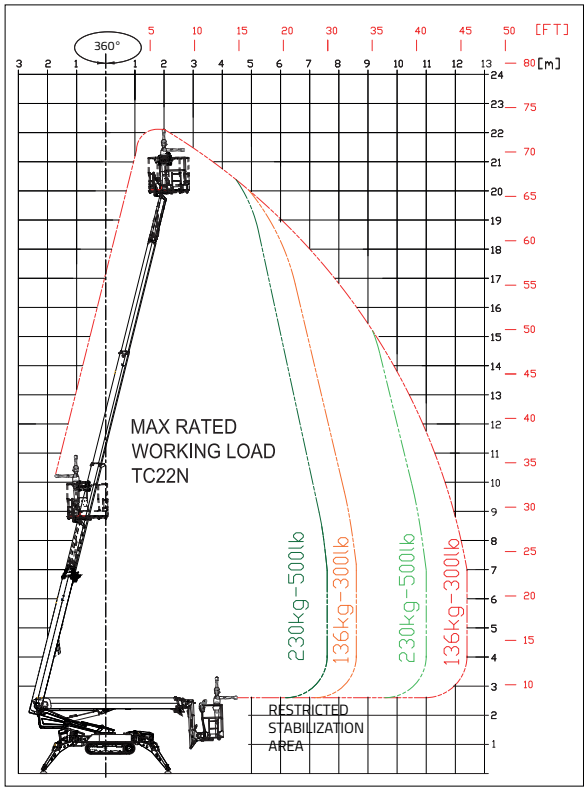

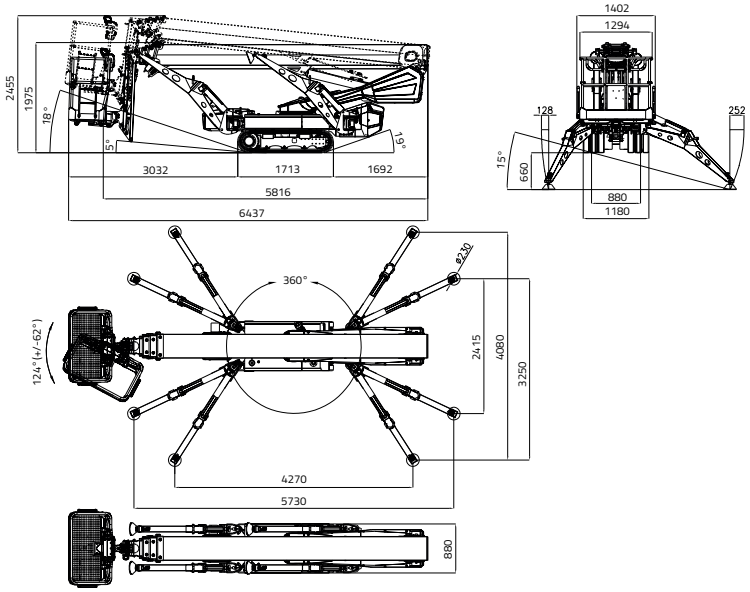

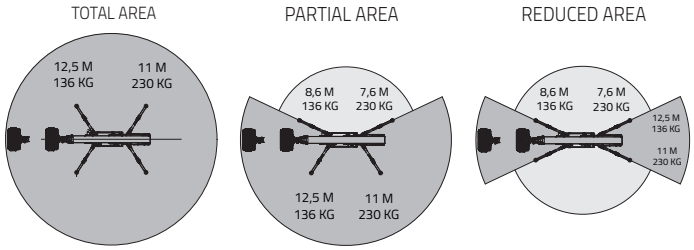

22 m	22 m	1480x610xh.1100 mm DSE (Dual Side Entry)	Automatic set up system IIIS std.
11 m	12,4 m	124° (+/-62°)	Remote control
6,44 m		880 - 1180 mm	GPRS-GPS
5,82 m		Total area 4080 x 4270 mm Reduced area 2415 x 5730 mm Partial area 3250 x (4270/5730) mm	R.A.H.M.
1,98 m			Lithium-ion battery pack 6,1 kWh
			Bi-energy (Diesel + Lithium-ion battery pack) 3,5kW 48V

HireSafe SOLUTIONS
HONEST, RELIABLE & REACTIVE
SOLUTIONS FOR WORKING AT HEIGHT
CONTACT US
0800 865 4455
info@hiresafesolutions.com
www.hiresafesolutions.com

TeleCrawler22N

DIESEL ENGINE

Brand ..... KUBOTA
Type Z602
Pistons no. and displacement. .....
..... double-cylinder 599 cm³
Max gross power .....
..... 14,5 HP - 10,8kW @ 3200 rpm
Electrical start ..... 12 volt

LITHIUM-ION SYSTEM

Lithium-ion powered ..... 6,1 kWh
Onboard battery charger .....
..... 220V o 110V +-30V 50-60 Hz
Autonomy ..... 4-5 h
Recharge time on flat batteries .....
..... 4 h (indicative)
Recharge time to 80% on flat batteries .....
..... 2 h (indicative)

ELECTRIC MOTOR

Standard ..... 230V / 50 Hz - 2,2 kW
Optional ..... 110V / 50 Hz - 2,2 kW

TRACKED UNDERCARRIAGE

Track tensioner ..... grease-filled
Rollers no. per side ..... 3 + slide

WEIGHT MACHINE Diesel ..... 2990 kg
WEIGHT MACHINE Lithium-ion ..... 2945 kg
WEIGHT MACHINE Bi-energy ..... 3075 kg

MAX WIND SPEED ..... 12,5 m/s

HireSafe SOLUTIONS
HONEST, RELIABLE & REACTIVE
SOLUTIONS FOR WORKING AT HEIGHT
CONTACT US
0800 865 4455
info@hiresafesolutions.com
www.hiresafesolutions.com