DIESEL RT SCISSOR LIFT

SR1018D / SR1218D
(SR3369D / SR4069D)

HIGHLIGHTS

LGMG SR18D Series rough terrain scissor lifts are specifically built for tough construction sites with four-wheel drive and fantastic gradeability. High load capacities with compact design provide a great combination for the larger working area and greater maneuverability through rough terrain job sites.

- High capacity, large platform with compact design maximises productivity.
- Powerful diesel engine and four-wheel drive make the machine ideal for varying conditions.
- Oscillating axels with great gradeability provide better performance on rough terrain job sites.
- Optional hydraulic outriggers deliver better stability on uneven ground.
- Intelligent self-diagnostic system for quick troubleshooting.

LGMG MOBILE ELEVATING WORK PLATFORMS

HireSafe SOLUTIONS

HONEST, RELIABLE & REACTIVE
SOLUTIONS FOR WORKING AT HEIGHT

CONTACT US
0800 865 4455
info@hiresafesolutions.com
www.hiresafesolutions.com

LGMG SR18D Series

SPECIFICATIONS

MODELS	SR1018D (SR3369D)		SR1218D (SR4069D)	
Measurements	**Metric**	**US**	**Metric**	**US**
Working Height Max.	11.7m	38.4ft	13.9m	45.6ft
Ⓐ Platform Height-Raised	9.7m	31.8ft	11.9m	39ft
Ⓑ Platform Height-Stowed	1.41m	4.62ft	1.56m	5.12ft
Ⓒ Platform Length	2.79m	9.15ft	2.79m	9.15ft
Ⓓ Platform Width	1.6m	5.25ft	1.6m	5.25ft
Ⓔ Overall Length(with ladder)	3.12m	10.2ft	3.12m	10.2ft
Ⓕ Overall Width	1.79m	5.81ft	1.79m	5.81ft
Ⓖ Overall Height-Rails Up	2.55m	8.36ft	2.7m	8.86ft
Overall Height-Rails Down	1.89m	6.2ft	2.04m	6.69ft
Ⓗ Extension Deck	1.52m	4.99ft	1.52m	4.99ft
Ⓘ Wheelbase	2.29m	75.1in	2.29m	75.1in
Ground Clearance-Center	0.23m	0.75ft	0.23m	0.75ft
PRODUCTIVITY				
Platform Occupants Max. (in/out)	4/2	4/2	3/2	3/2
Platform Capacity	454kg	998.8lbs	365kg	803lbs
Platform Capacity-Extension	140kg	308lbs	140kg	308lbs
Drive Height	Full Height			
Gradeability-Stowed	35%			
Turning Radius-Outside	4.75m	15.6ft	4.75m	15.6ft
Raise/Lower Speed	39/46s		61/55s	
Brakes	Four-wheel Brake			
Drive Mode	4×4			
Tires Type	Foam-filled			
Tires Size	663×283mm	26×12in	663×283mm	26×12in
POWER				
Power Source	Kubota D1105 18.5kw/24.8hp			
Fuel Tank Capacity	53L	14gal	53L	14gal
HYDRAULIC SYSTEM				
Hydraulic Oil Capacity	70L	18.5gal	70L	18.5gal
WEIGHT				
Machine Weight without Outriggers(CE/ANSI)	3980kg	8780lbs	5120kg	10290lbs
Machine Weight with Outriggers(Optional)	4400kg	9700lbs	5080kg	11200lbs

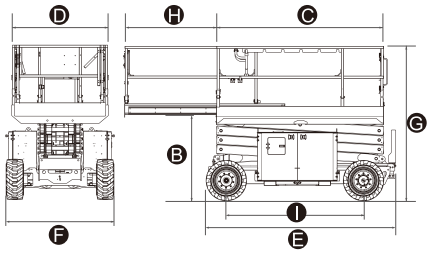

STANDARD FEATURES

- Proportional control
- Foldable guardrails
- Self-lock entry gate
- Descent alarm with flashing beacon
- Tilt alarm with lift cut-out
- Overload sensing system
- Emergency stop button
- On-board diagnostic system
- Oscillating axle
- Horn/Hour meter
- Four-wheel drive and break
- Full-height drive

OPTIONAL

- AC power to platform
- Auto-leveling outriggers
- Platform anti-collision device
- Solid tires
- Solid non-marking tires
- Foam-filled non-marking tires
- Hydraulic generator
- GPS

Machines in compliant with EN280 / ANSI 92.20 Standard.

Specifications subject to change without notice.Photos and diagrams in the page are for promotional purposes only.
2020 V1 Version

HireSafe SOLUTIONS

HONEST, RELIABLE & REACTIVE
SOLUTIONS FOR WORKING AT HEIGHT

CONTACT US
0800 865 4455
info@hiresafesolutions.com
www.hiresafesolutions.com