ZOOMLION

TELESCOPIC BOOM LIFTS

ZT23J/ZT26J

Comply with CE/ANSI/CSA Standard

HIGHLIGHTS

- Parallel four-link lifting mechanism for smooth boom movement
- Hexagonal boom design with good anti-fatigue performance and strong rigidity
- Smooth leveling and flexible chassis steering
- Load sensitive system, saving energy
- Upgraded telematics for high efficient service
- Deadweight lowering system for smooth operation and energy efficiency

FEATURES

Standard Features

Horn
Proportional control
Motion alarm
Flashing beacon
Self-closing entry gate
Emergency descent system
Emergency stop button
Auto-leveling system
On-board diagnostic system
Tilt protection system
Oscillating axle
Load sensing system
4.3' Led display
Swing-out engine tray

Accessories & Options

- Platform work light
- Anti-collision device
- AC power to platform

HireSafe SOLUTIONS

HONEST, RELIABLE & REACTIVE
SOLUTIONS FOR WORKING AT HEIGHT

CONTACT US
0800 865 4455
info@hiresafesolutions.com
www.hiresafesolutions.com

ZOOMLION

Model	ZT23J	
	Imperial	Metric
Size		
Work Height	82ft 4in	25.1 m
Platform Height	75ft 9in	23.1 m
Horizontal Outreach	59ft 4in	18.1m
A - Stowed Length	34ft 5in	10.5 m
B - Stowed Width	8ft	2.45m
C - Stowed Height	9ft	2.75m
D - Platform Length	8ft	2.44m
E - Platform Width	3ft	0.91m
F - Wheelbase	8ft 3in	2.52m
Tread	8ft	2.45m
G - Ground Clearance	1ft 3in	0.4m
Performance		
Platform Capacity (Unrestricted/Restricted)	660/1000lb	300/454kg
Drive Speed (Stowed)	3.73mph	6.0km/h
Gradeability	45% (24°)	45% (24°)
Turning Radius (Inside)	7ft 10in	2.4m
Turning Radius (Outside)	17ft 9in	5.4m
Turntable Swing	360° continuous	
Platform Rotation	±90°	
Tail Swing	5ft 4in	1.65m
Jib (Range of Articulation)	130° (-55°~75°)	
Max. Wind Speed	28mph	12.5m/s
Power		
Engine	KUBOTA V2403(EuropeV) KUBOTA V2403 (China stage III)	
Fuel Tank Capacity	39.6 (us gal)	150L
Control Voltage	12V DC	
Hydraulic Tank Capacity	39.6 (us gal)	150L
Drive Mode	4WD	
Steering Mode	Front-wheel	
Tire		
Type	36×14-20 solid tire (standard) 355/55-24.5 foam-filled tire (option) 355/55D-625 foam-filled tire (option)	
Weight		
Gross	27557lb	12500kg

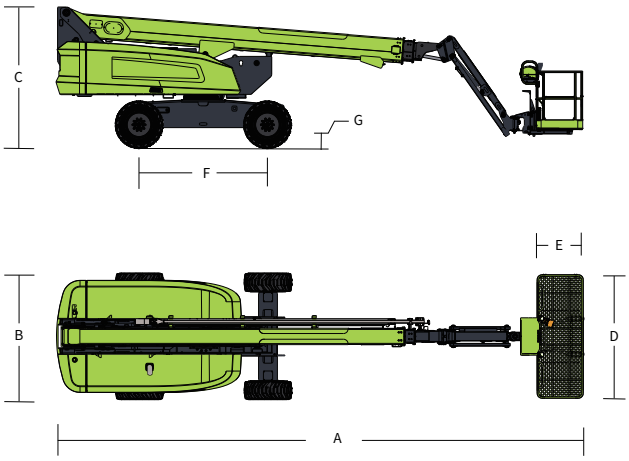

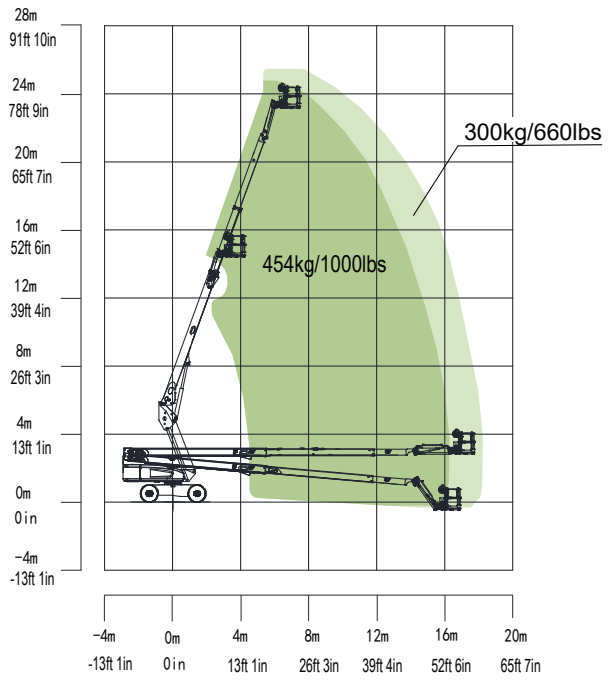

Range of Motion ZT23J

ZOOMLION ACCESS reserves the right to make specification and/or equipment changes without prior notification.
Product specifications are updated to January, 2025.

HireSafe SOLUTIONS

HONEST, RELIABLE & REACTIVE
SOLUTIONS FOR WORKING AT HEIGHT

CONTACT US
0800 865 4455
info@hiresafesolutions.com
www.hiresafesolutions.com