

# ZOOMLION TELESCOPIC BOOM LIFTS ZT23J/ZT26J

Comply with CE/ANSI/CSA Standard



## HIGHLIGHTS

- ▶ Parallel four-link lifting mechanism for smooth boom movement
- ▶ Hexagonal boom design with good anti-fatigue performance and strong rigidity
- ▶ Smooth leveling and flexible chassis steering
- ▶ Load sensitive system, saving energy
- ▶ Upgraded telematics for high efficient service
- ▶ Deadweight lowering system for smooth operation and energy efficiency

## FEATURES

### Standard Features

Horn
Proportional control
Motion alarm
Flashing beacon
Self-closing entry gate
Emergency descent system
Emergency stop button
Auto-leveling system
On-board diagnostic system
Tilt protection system
Oscillating axle
Load sensing system
4.3' Led display
Swing-out engine tray

### Accessories & Options

- ▶ Platform work light
- ▶ Anti-collision device
- ▶ AC power to platform

**HONEST, RELIABLE & REACTIVE**  
SOLUTIONS FOR WORKING AT HEIGHT



### CONTACT US

-  0800 865 4455
-  [info@hiresafesolutions.com](mailto:info@hiresafesolutions.com)
-  [www.hiresafesolutions.com](http://www.hiresafesolutions.com)



# ZOOMLION

Model	ZT26J	
	Imperial	Metric
<b>Size</b>		
Work Height	94ft 1in	28.7m
Platform Height	87ft 7in	26.7m
Horizontal Outreach	72ft 6in	22.1m
A - Stowed Length	39ft	11.91m
B - Stowed Width	8ft 2in	2.49m
C - Stowed Height	9ft 3in	2.82m
D - Platform Length	8ft	2.44m
E - Platform Width	3ft	0.91m
F - Wheelbase	9ft 2in	2.8m
Tread	8ft 2in	2.49m
G - Ground Clearance	1ft 3in	0.4m
<b>Performance</b>		
Platform Capacity (Unrestricted/Restricted)	660/1000lb	300/454kg
Drive Speed (Stowed)	3.42mph	5.5km/h
Gradeability	45% (24°)	45% (24°)
Turning Radius (Inside)	11ft 5in	3.5m
Turning Radius (Outside)	20ft	6.1m
Turntable Swing	360° continuous	
Platform Rotation	±90°	
Tail Swing	5ft 8in	1.75m
Jib (Range of Articulation)	130° (-55°~75°)	
Max. Wind Speed	28mph	12.5m/s
<b>Power</b>		
Engine	KUBOTA V2607(Europe V) KUBOTA V3307(China stage III)	
Fuel Tank Capacity	39.6 (us gal)	150L
Control Voltage	12V DC	
Hydraulic Tank Capacity	39.6 (us gal)	150L
Drive Mode	4WD	
Steering Mode	Front-wheel	
<b>Tire</b>		
Type	385/65-24 solid tire (standard) 15-625 foam-filled tire (option) 385/55-24.5 foam-filled tire (option)	
<b>Weight</b>		
Gross	39903lb	18100kg

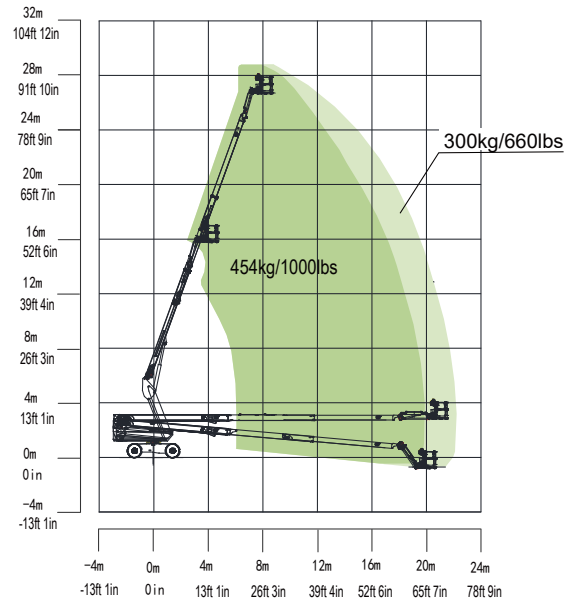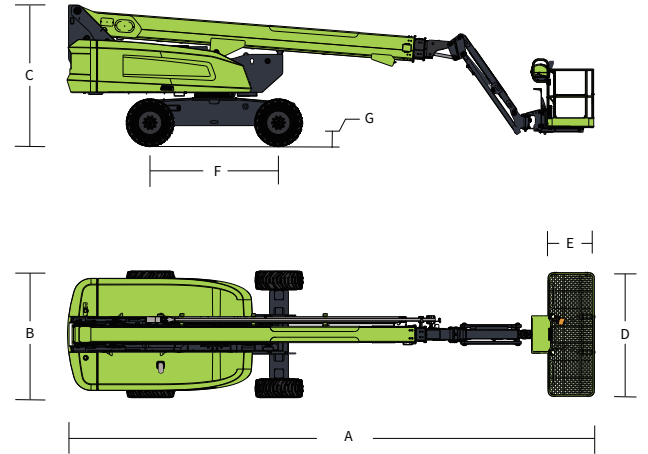

Range of Motion ZT26J

ZOOMLION ACCESS reserves the right to make specification and/or equipment changes without prior notification. Product specifications are updated to January, 2025.

