

SPECIFICATIONS


Size	Metric	British
Max. Working Height A	28.00m	91ft 10in
Max. Platform Height B	26.00m	85ft 4in
Overall Length C	5.69m	18ft 8in
Overall Width D	1.40m	4ft 7in
Overall Height(Rails Up) E	4.16m	13ft 8in
Overall Height(Rails Down) F	3.17m/☆3.48m	10ft 5in/☆11ft 5in
Platform Size(Length×Width)	5.08m×1.20m	19ft 2in × 3ft 11in
Platform Extension Size G	1.90m	6ft 3in
Ground Clearance(Stowed/Raised)	0.19m/0.02m	7in/1in
Wheelbase H	4.14m	13ft 7in
Turning Radius(Inside/Outside)	2.50m/3.30m	8ft 2in/10ft 10in
Tyres	28×12-22	28×12-22

Performance		
S.W.L	750kg	1653lb
S.W.L On Extension	750kg	1653lb
Max. Occupants (Indoor/Outdoor)	2/2	2/2
Gradeability	30%	30%
Travel Speed(Stowed)	1.5km/h	0.93mph
Travel Speed(Raised)	0.1km/h	0.06mph
Max. Working Slope	1°(0°)	1°(0°)
Up/Down Speed	115/95sec	115/95sec

Weight		
Overall Weight	19030kg	41954lb

Power		
Hydraulic Tank	180L	47gal
Lithium Battery	80V/520Ah	80V/520Ah
Charger	80V/80A	80V/80A
Driving Motor	4×53VAC/2kW	4×53VAC/2kW
Lifting Motor	53VAC/28kW	53VAC/28kW

Note: ☆ indicates overall height with guardrails folded inward.

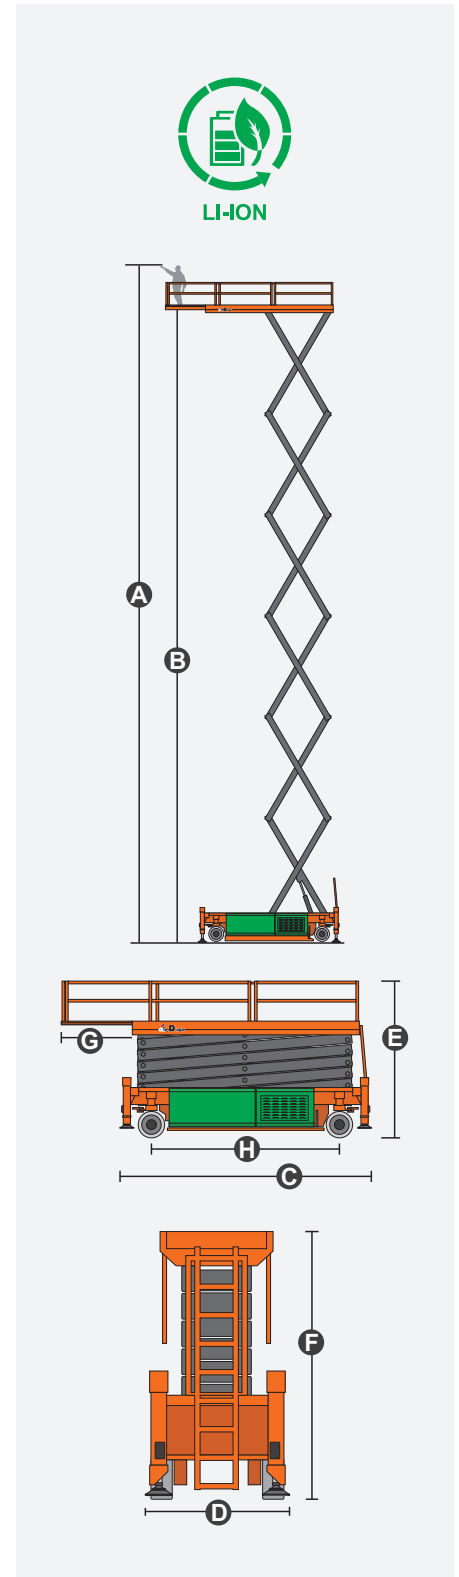

CE EN 280



FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Four-Wheel Drive
- Four-Wheel Steering
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height

